

Features

Compatible with Autocall ES Net network

Basic system includes:

- Models available with Color ES Touch Screen Display or Monochrome 2 line x 40 Character Display
- Capacity for up to 1000 addressable IDNet points, or up to 1000 addressable MX Loop points and up to 127 VESDA SLI points, with up to 2000 points of annunciation and up to 20 internal and external card addresses
- CPU assembly includes dedicated compact flash memory for on-site system information storage and convenient Ethernet service port access
- 8 A power supply with up to 2 A of auxiliary power and battery charger capacity for up to 110 Ah batteries (UL) or up to 50 Ah batteries (ULC); 33 Ah max in one bay control cabinet, 50 Ah max with A100-0650 battery shelf in two bay control cabinet
- 4 onboard Class A or B, 3 A NACs and one programmable auxiliary relay output rated for 2 A @ 32 VDC
- Remote annunciator module support through Remote Unit Interface (RUI) communications port, either Class B or Class A operation
- 48 LED Control Unit mount annunciation provides 40 Red and 8 Yellow pluggable LEDs (select models), optional LED kits are available for custom LED configurations

Optional Main System Supply 2 and door mounted modules, and other options include:

- City Connect Module
- Alarm Relay module
- Battery brackets for seismic area protection

Optional block space modules include:

- Fire Alarm Network Interface Card (NIC) for ES Net
- Peer to-Peer network communications, supports either Class B or Class X operation
- Ethernet connectivity options include ES Net Network Interface Card, Building Network Interface Card (BNIC) and BACpac Ethernet Portal
- Dual RS-232 Module (for printer or third party interface)
- VESDA Air Aspiration High Level Interface
- Serial DACT
- Additional IDNet and MX Loop addressable channels
- 8-Point Zone/Relay Module
- 4-Point Auxiliary Relay Module with or without Feedback

Compatible with Autocall remotely located:

- 4098-9757 QuickConnect2 TrueAlarm smoke sensors
- 4009 IDNet NAC Extenders (4009A)
- A4081 Series, 110 Ah Battery Chargers
- 4100-7400 Series Graphic Annunciators
- A4606-9102 Remote LCD Annunciator, A100-9400 Series Remote ES Touch Screen Displays, A100-9400 Series Remote InfoAlarm Command Centers, and A602 Series Status Command Units (SCU) and Remote Command Units (RCU) Annunciators
- IP communicator compatibility



Figure 1: 1-Bay Cabinet with 2 x 40 Monochrome LCD Display



Figure 2: 1-Bay Cabinet with 2 x 40 Monochrome LCD Display and LED Annunciation



Figure 3: 2-Bay Cabinet with 2 x 40 Monochrome LCD Display

4010ES Agency listings

- UL 864 - Control Units, System (UOJZ); Control Unit Accessories, System, Fire Alarm (UOXX); Control Units, Releasing Device Service (SYZV); Smoke Control System Equipment (UUKL)
- UL 1076 - Proprietary Alarm Units (APOU)
- UL 1730 - Smoke Detector Monitors and Accessories (UULH)
- UL 2017 - Emergency Alarm System Control Units, CO detection (FSZI); Process Equipment Management (QVAX)
- ULC-S527 - Control Units, System, Fire Alarm (UOJZ7); Control Unit Accessories, System, Fire Alarm (UOXX7); Control Units, Releasing Device Service (SYZV7)
- ULC-S559 - Central Station Fire Alarm System Units (DAYR7)
- ULC/ORD-C1076 - Proprietary Burglar Alarm System Units (APOU7)
- ULC/ORD-C100 - Smoke Control System Equipment, (UUKL7)

Introduction

4010ES series fire detection and control units

4010ES series fire detection and control units provide leading installation, operator, and service features for customer applications in the mid-range addressable fire alarm systems market. An onboard Ethernet port provides fast external system communications to expedite installation and service activity. Dedicated compact flash memory archiving provides secure on-site system information storage of electronic job configuration files.

* This product has been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listings 7120-2269:0546, 7300-2269:0557, 7272-2269:0509, 7272-2269:0537, 7165-2269:0542 and 7165-2269:0541 for allowable values and/or conditions concerning material presented in this document. Refer to Tables 3 and 4 for applicable listings at time of publication. Additional listings may be applicable; contact your local Autocall product supplier for the latest status. Refer to specific product listings in tables 2 and 3.

Modular design

A variety of functional modules are available to meet specific system requirements. Selections allow control units to be configured for either Stand-Alone or Networked fire control operation.

Mechanical description

- The mounting box provides convenient stud markers for drywall thickness and nail-hole knockouts for quicker mounting
- Smooth box surfaces are provided for locally cutting conduit entrance holes exactly where required
- The hinged user interface control unit easily opens for internal access
- NACs are mounted directly on power supply assemblies providing minimized wiring loss, compact size, and readily accessible terminations
- Modules are power-limited except as noted, such as relay modules
- Doors include tempered glass inserts; boxes and doors are available in platinum or red
- Box and door or retainer assemblies are included with basic control unit assemblies
- Cabinet assembly is rated NEMA 1 and IP 30
- Cabinet assembly design has been seismic tested and is certified to IBC and CBC standards as well as to ASCE 7 categories A through F, requires battery brackets as detailed on data sheet *Battery Brackets for Seismic Activity Applications AC2081-0019*

Control unit hardware

Master Controller and Main System Supply 2

Mounted in the upper section of the 4010ES cabinet. See the loading reference diagrams in [Cabinet one and two bay loading reference](#).

4010ES Block Space Option Cards

4010ES Block Space Option Cards mount to the left of the 4010ES Main System Supply 2. In two bay cabinets block space option cards also mount below the 4010ES ESS.

Other 4010ES options

The 4010ES City Connect module or the optional Alarm Relay module mount directly to the Main System Supply 2. These options are mutually exclusive.

The battery compartment

The battery compartment is located in the bottom of the 4010ES cabinet. The cabinet allows for up to 33 Ah battery capacity for 1 bay systems, and 50 Ah for 2 bay systems. 50 Ah batteries also require the use of 4100-0650 battery shelf.

Figure 13 identifies mounting locations for optional 4010ES modules.

Software feature summary

- TrueAlarm individual analog sensing with front panel information and selection access
- Dirty TrueAlarm sensor maintenance alerts, service and status reports including almost dirty
- TrueAlarm magnet test indication appears as distinct test abnormal message on display when in test mode
- TrueAlarm sensor peak value performance report
- Install Mode allows grouping of multiple troubles for uninstalled modules and devices into a single trouble condition
- Module level ground fault searching assists installation and service by locating and isolating modules with grounded wiring
- Recurring Trouble Filtering allows the control unit to recognize, process, and log recurring intermittent troubles, such as external wiring ground faults, but only sends a single outbound system trouble to avoid nuisance communications

- WALKTEST silent or audible system test performs an automatic self-resetting test cycle

Compatible peripheral devices

The 4010ES is compatible with an extensive list of remote peripheral devices including printers and both conventional and addressable devices including TrueAlarm analog sensors.

Addressable device control

The 4010ES provides standard addressable device communications for IDNet compatible devices. Using a two wire communications circuit, you can interface individual devices such as manual fire alarm stations, TrueAlarm sensors, conventional IDC zones, and sprinkler waterflow switches to the addressable controller to communicate their identity and status.

Addressability facilitates the display of the location and condition of the connected device on the operator interface LCD and on remote system annunciators. Additionally, control circuits such as fans or dampers, may be individually controlled and monitored with addressable devices.

Addressable operation

Each addressable device on the communication channel is continuously interrogated for status condition such as: normal, off-normal, alarm, supervisory, or trouble. Both Class B and Class A pathway operation are available. Sophisticated poll and response communication techniques ensure supervision integrity and allow for T-tapping of the circuit for Class B operation. Devices with LEDs pulse the LED to indicate receipt of a communications poll. Use the control unit to turn the LED on steady.

IDNet addressable channel capacity

The Main System Supply 2 provides an electrically isolated IDNet2 signaling line circuit (SLC) that supports up to 250 addressable monitor and control points intermixed on the same pair of wires. Additional 250 address IDNet 2+2 Modules with **four** short circuit isolating output loops are available. IDNet2 and IDNet 2+2 Module SLCs are isolated from other system reference voltages to reduce common mode noise interaction with adjacent system wiring.

Table 1: IDNet 2 and IDNet 2+2 SLC wiring specifications

Specification	Rating	
Maximum distance from control unit for each device load	0 to 125	4000 ft (1219 m); 50 ohms
	126 to 250	2500 ft (762 m); 35 ohms
Total wire length allowed with T-taps for Class B wiring	Up to 12,500 ft (3.8 km); 0.60 μ F	
Maximum capacitance between IDNet channels	1 μ F	
Wire type and connections	Shielded or unshielded, twisted or untwisted wire*	
Connections	Terminals for 18 to 12 AWG (0.82 mm ² to 3.31 mm ²)	
Installation instructions	579-989AC	
Compatibility includes: IDNet communicating devices and TrueAlarm sensors including QuickConnect2 sensors. See data sheet AC4090-0011 for additional reference.		
Note: *Some applications may require shielded wiring. Review your system with your local Autocall product supplier.		

TrueAlarm system operation

Addressable device communications include operation of TrueAlarm smoke and temperature sensors. Smoke sensors transmit an output value based on their smoke chamber condition and the CPU maintains a current value, peak value, and an average value for each sensor.

Status is determined by comparing the current sensor value to its average value. Tracking this average value as a continuously shifting reference point filters out environmental factors that cause shifts in sensitivity.

Programmable sensitivity

The programmable sensitivity of each sensor is selectable at the control unit for different levels of smoke obscuration (shown directly in percent) or for specific heat detection levels. To evaluate whether the sensitivity should be revised, the peak value is stored in memory and can be easily read and compared to the alarm threshold directly in percent.

CO sensor bases

CO sensor bases combine an electrolytic CO sensing module with a TrueAlarm analog sensor to provide a single multiple sensing assembly using one system address. The CO sensor can be enabled or disabled, used in LED or Switch modes and custom control, and can be made public for communication across a fire alarm network. Refer to data sheet *TrueAlarm CO Sensor Bases for Smoke, Heat, and Photo/Heat Sensors using IDNet Communications AC4098-0052* for details.

TrueAlarm heat sensors

You can select TrueAlarm heat sensors for fixed temperature detection, with or without rate-of-rise detection. Utility temperature sensing is also available, typically to provide freeze warnings or alert to HVAC system problems. Readings are selectable as either Fahrenheit or Celsius.

TrueSense early fire detection

Multi-sensor A4098-9754 provides photoelectric and heat sensor data using a single 4010ES IDNet address. The control unit evaluates smoke activity, heat activity, and their combination, to provide TrueSense early detection. For more details on this operation, refer to data sheet *TrueAlarm Multi-Sensor Model A4098-9754 Providing TrueSense Early Fire Detection AC4098-0024*.

Diagnostics and default device type

Sensor status

TrueAlarm operation allows the control unit to automatically indicate when a sensor is almost dirty, dirty, and excessively dirty. The NFPA 72 requirement for a test of the sensitivity range of the sensors is fulfilled by the ability of TrueAlarm operation to maintain the sensitivity level of each sensor. CO sensors track their 10 year active life status providing indicators to assist with service planning. Indicators occur at: 1 year, 6 months, and when end of life is reached.

Modular TrueAlarm sensors

Modular TrueAlarm sensors use the same base and different sensor types (smoke or heat sensor) and can be easily interchanged to meet specific location requirements. This allows intentional sensor substitution during building construction when conditions are temporarily dusty, instead of covering smoke sensors, causing them to be disabled. Heat sensors may be installed without reprogramming the control unit. The control unit will indicate an incorrect sensor type, but the heat sensor will operate at a default sensitivity to provide heat detection for building protection at that location.

Master controller (CPU)

- The 4010ES Master Controller includes dedicated compact flash Mass Storage memory for on-site system information storage and convenient Ethernet service port access
- Convenient front panel accessed Ethernet port for quick and easy download of site-specific programming and firmware enhancements. Firmware enhancements are made through software downloads to the onboard flash memory.
- Every downloaded job is automatically stored to Compact flash without overwriting earlier versions providing a means for recovering previous

configurations

- Downtime is reduced because the system stays running during download
- Modifications can be uploaded as well as downloaded for greater service flexibility
- Mass Storage allows job specific files to be stored in the control unit such as test and inspection reports, record drawings, specifications, and more
- RUI (Remote Unit Interface) communications port supports either Class B or Class A operation for remote annunciation equipment

Basic control unit description

4010ES control units include:

- The Main System Supply II provides the power source and the input/output connections for the basic 4010ES control unit listed below
- An operator interface, master controller with compact flash, IDNet or MX Loop addressable device SLC(s) with short circuit isolating loops configurable for Class B or Class A operation.
- 8 A power supply with up to 2 A of auxiliary power, 110 Ah (UL)/50 Ah (ULC) battery charger (33 Ah maximum in One-Bay cabinet, 50 Ah maximum with A100-0650 battery shelf in Two-Bay control cabinet); four Class A or Class B NACs rated @ 3 A each for Special Application Appliances, selectable for synchronized strobe, or SmartSync horn/strobe operation over two wires; and 2 A for Regulated 24 DC operation; one programmable auxiliary relay rated for 2 A @ 32 VDC.
- One RUI Class B or Class A communications port for remote annunciation devices, cabinet and door.
- Support for up to 20 internal and external card addresses. Other standard options may be provided depending on model. See Table 3 and for additional details on specific models.

8-Point Zone/Relay module details

- **Select as IDC or Relay:** configure up to eight Class B IDCs, or up to four Class A IDCs; or up to eight Relay outputs rated 2 A resistive @ 30 VDC (N.O. or N.C.); or combinations of IDCs and Relays; each zone is separately configurable as an IDC or Relay output.
- **IDC support:** each IDC supports up to 30, two-wire devices. Zone relay modules may be powered directly from the control unit power supply or through the optional 25 VDC regulator module where required for 2-wire detector compatibility. Refer to *2-Wire Detector Compatibility Chart 579-832* for additional details.
- **IDC EOL resistor values are selectable as:** 3.3 kOhms, 2 kOhms, 2.2 kOhms, 3.4 kOhms, 3.9 kOhms, 4.7 kOhms, 5.1 kOhms, 5.6 kOhms, 6.34/6.8 kOhms, and 3.6 kOhms + 1.1 kOhms; see instructions for more details.

Color ES Touch Screen Display

The Color ES Touch Screen Display interface offers intuitive operation similar to a tablet or smart phone. With a larger area format versus an individual text line display, more information is available at a glance, and minimal key presses are needed to access detailed information.

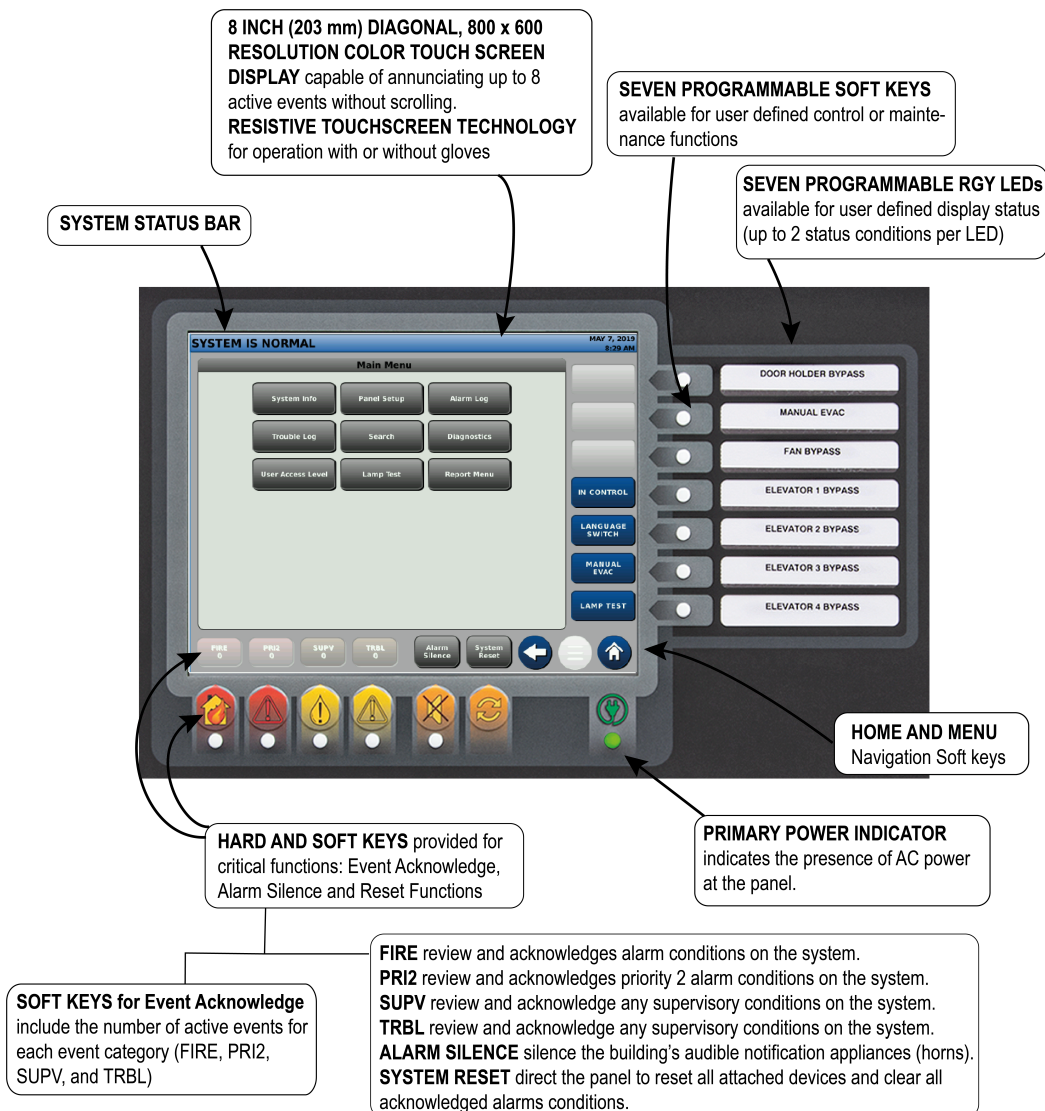


Figure 4: ES Touch Screen Display Operator Interface

Features

ES Touch Screen Displays provide customized operating experience

- Event activity display choices include: First 8 Events; or First 7 Events with emphasis on Most Recent; or First 6 Events with emphasis on First and Most Recent (individually selectable for each event type)
- System reports are easily viewable; logs can be read with minimal scrolling
- Up to two languages are available per system, easily selected by programmable key press
- Information sent to Remote ES Touch Screen Displays can be vectored by point or zone
- Both Hard and Soft keys available for critical functions: Event Acknowledge, Alarm Silence, and Reset Functions
- Resistive touchscreen technology allows operation with or without gloves
- Seven programmable RGY LEDs available for user-defined display status (up to 2 status conditions per LED)
- Seven programmable Soft keys available for user-defined control or maintenance functions
- PRI2 Soft key label can be changed to CO to annunciate Carbon Monoxide detection status
- ES Touch Screen Display can be programmed to report individual points or groups of points as a single zone
- Supports ability to display a custom watermark background file of a company logo or other desired display content

Display properties

- 8 inch (203 mm) diagonal, 800 x 600 resolution color touch screen display capable of annunciating up to 8 active events without scrolling
- Bright white LED backlighting provides efficient and long lasting illumination; backlight is dim in quiescent state, automatically switches to full power on touch or on event activity in system.

Description

ES Touch Screen Displays for 4100ES fire alarm systems provide a large display with extended information content, dual language support including UTF-8 character languages, and an intuitive control key interface per the following:

- Up to 10 ES Touch Screen Displays are supported per 4100ES control panel; able to allow one ES Touch Screen Display to take-control and to designate access levels for interfaces not in-control; programmable LEDs can be assigned to in-control status indications
- Menu-driven format conveniently prompts operators for the next action required
- Direct point callup displays individual points alphabetically and then homes in on the logical choice as more point information is entered
- Event categories are color coded for quick visual representation; Red for Alarm and Priority 2 Events; Yellow for Supervisory and Trouble events
- Date formats are either MM/DD/YY or DD/MM/YY
- Time formats are either 24 hour or 12 hour with AM/PM
- System Normal screen supports a color background (watermark) for company name, company logo, or other desired display content

Example Display Screens

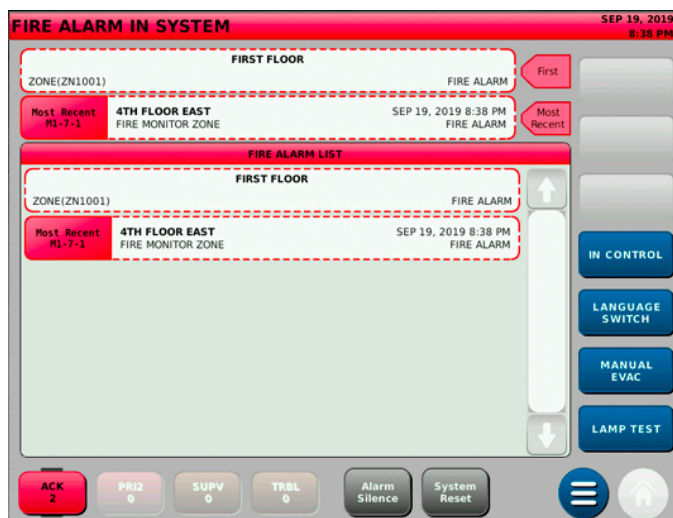


Figure 5: First and Most Recent Alarm Display



Figure 6: Main Menu



Figure 7: First Eight Active Trouble Events List



Figure 8: Direct Point Callup

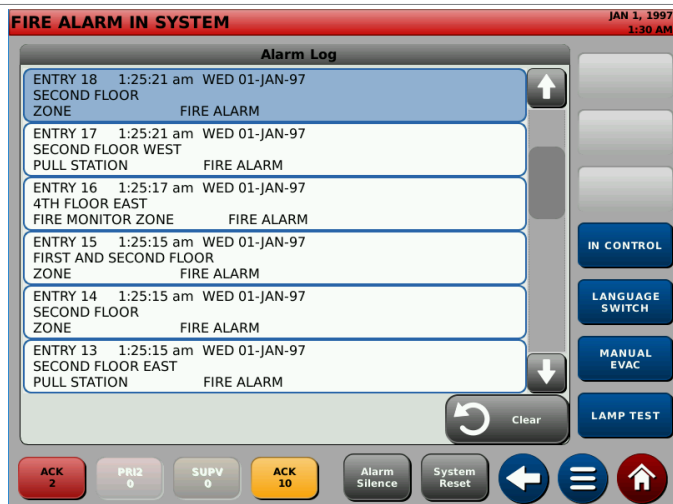


Figure 9: Alarm History Log

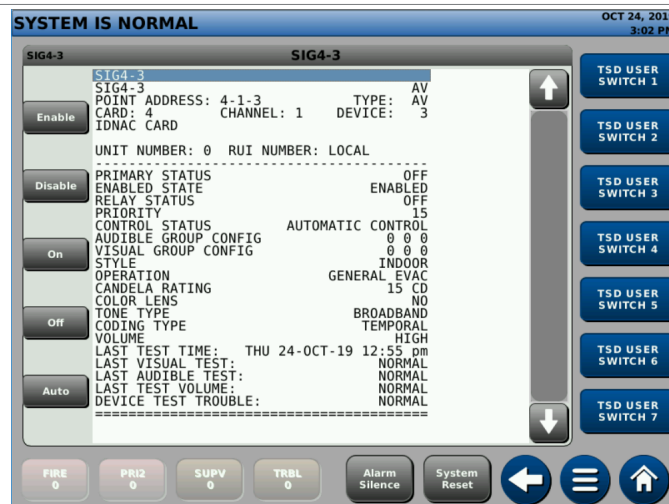


Figure 10: Detailed Point Status Screen for TrueAlert ES Appliance

Specifications

Table 2: General ES Touch Screen Display Specifications

Specification	Rating
Resolution	800 x 600 Pixels (RGB)
Size / Type	8 inch (203 mm) Diagonal / Color Touch Screen
Touch Screen Technology	Resistive
Event Display	Up to 8 Events without scrolling
Normal Screen Custom Watermark File Format	680 x 484 Pixels: BMP, JPG, TIFF, GIF or PNG file format
Environmental	Operating Temperature: 32°F to 120°F (0°C to 49°C)
	Operating Humidity: Up to 93% RH, non-condensing @ 90°F (32°C) maximum

Operator Interface with Monochrome 2x40 LCD Features

- Provides convenient and extensive operator information using a logical, menu-driven display
- Multiple automatic and manual diagnostics for maintenance reduction
- Convenient PC programmer label editing
- Password access control
- Alarm and Trouble History Logs for up to 2000 total events are available for viewing from the LCD, or capable of being printed to a connected printer, or downloaded to a service computer

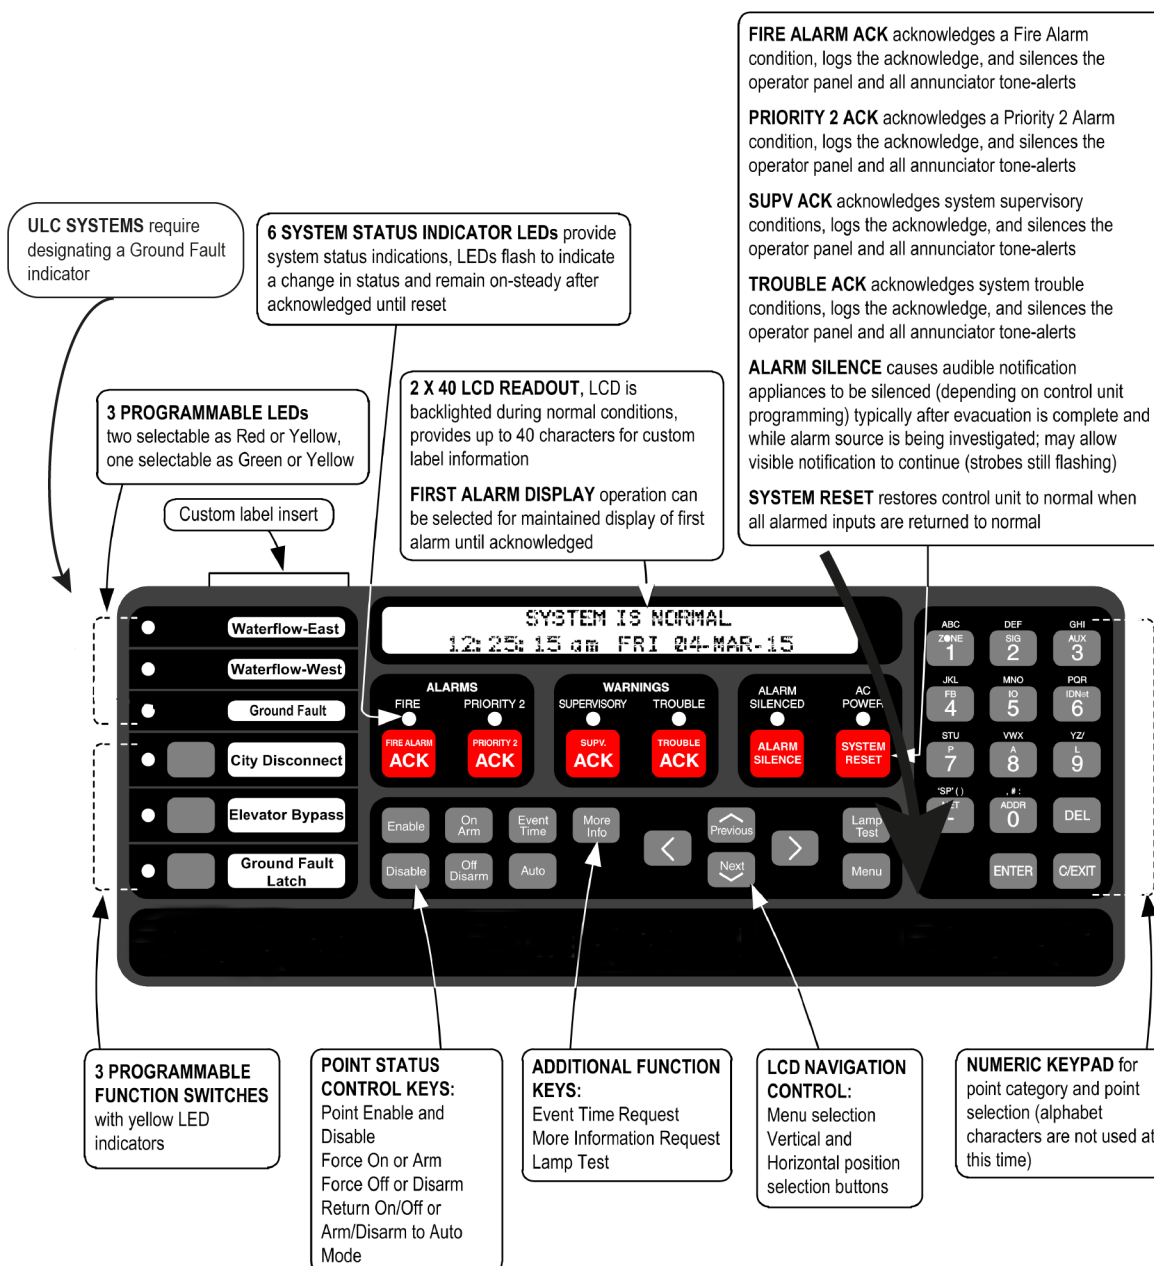


Figure 11: Operator interface

Basic control unit model selection, one bay control units

Supervisory and Alarm current specifications are for determining battery standby requirements. Current specifications include an active RUI channel. Models with an IDNet channel include 20 IDNet device LEDs activated in alarm. Models with MX communications include module base current. Actual IDNet or MX channel device current is not included, see [Addressable Device Load Specifications for Battery Standby](#) for details. For models with 48 LED Annunciation, alarm also includes 24 LEDs activated.

Table 3: Basic control unit model selection, one bay control units

SKU	Control unit color	Language & voltage	Listing	Features	Supv. current	Alarm current	Available option blocks
A010-9401 A010-9401BA	Red	English 120 VAC	UL, FM	Basic Control Unit with 2x40 LCD Operator Interface and one 2-loop Isolated IDNet+ Communications Channel, Class A or Class B operation, with support for up to 248 addressable IDNet points	316 mA	430 mA	Three 4 in. x 5 in. blocks
A010-9402 A010-9402BA	Platinum	English 120 VAC			316 mA	430 mA	
A010-9501 A010-9501BA	Red	English 220 VAC to 240 VAC			316 mA	430 mA	
A010-9502 A010-9502BA	Platinum	English 220 VAC to 240 VAC			316 mA	430 mA	
A010-9503BA	Red	English 220 VAC to 240 VAC		Basic Control Unit with 2x40 LCD Operator Interface and one MX Loop Channel Class A or B with support for up to 250 addressable MX Loop points	346 mA	415 mA	One 4 in. x 5 in. block

Note: Model numbers ending in BA are assembled in the USA.

Basic control unit model selection, two bay control units

Note: Supervisory and Alarm current specifications are for determining battery standby requirements. Current specifications include an active RUI channel. Models with IDNet channels include 20 IDNet device LEDs activated in alarm per channel. Models with MX communications include unloaded module current only. Actual IDNet or MX channel device current is not included, see [Addressable Device Load Specifications for Battery Standby](#) for details.

Table 4: Basic control unit model selection, two bay control units

SKU	Control unit color	Language and voltage	Listings	Features	Available option blocks	Supv. current	Alarm current
A010-9421 A010-9421BA	Red	English 120 VAC	UL, FM	Basic Control Unit with 2x40 Operator Interface , one 2-loop isolated IDNet 2 Communications Channel and one 4-loop Isolated IDNet 2+2 Communications Channel Module, Class A or Class B operation, with support for up to 500 addressable IDNet points	Ten 4 in. (101.6 mm) x 5 in. (127 mm) blocks	391 mA	545 mA
A010-9422	Platinum					UL, ULC	Same features as above with 48 LED annunciation
A010-9428			411 mA	610 mA			
A010-9435	Red	English 120 VAC Standard (multiple languages available, contact your local Simplex product supplier for details)	UL, ULC	Basic control unit with ES Touch Screen Operator Interface and (1) Two-loop Isolated IDNet 2 Communications Channel, (1) Four-loop Isolated IDNet 2+2 Communications Channel Module, Class A or Class B operation, with support for up to 500 addressable IDNet points		486 mA	661 mA
A010-9521 A010-9521BA	Red	English 220 VAC to 240 VAC	UL, FM	Basic Control Unit with 2x40 Operator Interface , one 2-loop isolated IDNet 2 Communications Channel and one 4-loop Isolated IDNet 2+2 Communications Channel Module, Class A or Class B operation, with support for up to 500 addressable IDNet points		391 mA	545 mA
A010-9522	Platinum		UL			391 mA	545 mA
Note: Model numbers ending in BA are assembled in the USA.							

Addressable Device Load Specifications for Battery Standby

Table 5: Addressable device load specifications for battery standby

Addressable channel	Device load	Supervisory current	Alarm current
IDNet2 and IDNet 2+2 Channel Device Currents (20 device LEDs in alarm are included with control unit and module currents) Supervisory = 0.8 mA per device Alarm = 1 mA per device	With 250 devices add	200 mA	250 mA
	With 125 devices add	100 mA	125 mA
	With 50 devices add	40 mA	50 mA

Block space option card selection

Note:

Maximum block option module quantities may require 2 bay cabinets. 1 bay cabinets are limited to three option block spaces total. See Figure 13 for option module availability. Supervisory and Alarm current specifications consider no load on addressable channels except as noted. See [Addressable Device Load Specifications for Battery Standby](#) for battery standby.

Table 6: Single block option modules

SKU	Features	Supervisory current	Alarm current	Option block usage
A010-9912	Serial DACT Note: Must mount in Block D under Main System Supply 2	30 mA	40 mA	1 block (must mount in top bay, block D)
A010-9908	4 point Aux Relay Module	15 mA	60 mA	1 block (11 max)
A010-9916	Voltage Regulator Module, 22.8 VDC to 26.4 VDC (25 VDC nominal); isolated and resettable output; includes earth detection circuit and trouble relay for status monitoring. One 4010-6305 harness (see below) is required for each A010-9935 module powered from the A010-9916.	3 A maximum with 2.5 A load	4.9 A maximum with 4 A load	1 block (1 max)
A010-9918	Dual RS-232 Module	60 mA		1 block (3 max)
A010-9915	BACpac Ethernet Portal Module; requires A010-9918 RS-232 Module (no address required)	123 mA		
A010-9901	VESDA HLI	60 mA		1 block (1 max)
A010-9935	8-point zone/relay 4 in. x 5 in. flat module. Supports eight Class B or four Class A IDCs. Mounts in any open block in a master controller or expansion bay. Alarm current shown is for 8 Class B IDCs using 3.3K end-of-line-resistors with 4 in. alarm and 4 in. standby. Standby current shown is for all 8 IDCs in standby. Refer to <i>Zone/Relay Module Installation Instructions 579-1236AC</i> for additional information.	83 mA	295 mA	1 block (11 max)
A010-9936	4 DPDT Auxiliary Relays with Feedback, contacts rated for 2A Resistive/0.5A Inductive @ 30 VDC or 0.5A Resistive/0.5A Inductive @ 120 VAC (see <i>579-1306AC</i> installation instructions for additional information)	18 mA	65 mA	1 block (11 Maximum)
A100-6305	25V regulator harness for 8-point zone/relay module. One required for each 8-point zone/relay module to be powered by the A100-9916 25V regulator module. A maximum of five 8-point zone/relay modules may be powered from the A100-9916 for each bay.	N/A		
A010-9929	IDNet 2+2 Module, 250 point capacity; electrically isolated output with four short circuit isolating Class B or Class A output loops; alarm currents for 50 and above devices includes 20 device LEDs in alarm. See Table 5 for individual device currents.	No device	50 mA	1 block (3 max)
		50 devices	90 mA	
		125 devices	150 mA	
		250 devices	250 mA	
			60 mA	
			150 mA	
			225 mA	
			350 mA	

Table 7: Dual Vertical Block (flat) modules**

SKU	Features	Option block Usage	Supervisory current	Alarm
A010-9928	For one bay control units only. Dual Vertical Block Card Mounting Kit, allows selecting two, dual Vertical Block (flat) modules from the list below; mounts at right angle to chassis (note block usage details)	Two Vertical Blocks (1 max, mounts in top bay, block space A and B only)	N/A	N/A

** For details on other dual vertical block network options refer to data sheet *ES Net Network Applications, Communications, Options and Specifications AC4100-0076*, and *Building Network Interface Card (BNIC) AC4100-0061*.

Additional control unit feature selection (block space is not used)

Table 8: Additional control unit features

SKU	Features	Supervisory current	Alarm current	Mounting requirements
A010-9909	City Connect Module w/ disconnect switches	20 mA	36 mA	Mounts on Main System Supply (one max)
A010-9911	Alarm Relay Module	15 mA	37 mA	Mounts on Main System Supply (one max)
A100-5128	Battery Distribution Terminal Block, mounts to side of box, required when battery connection leaves the 4010ES box. Also used in the 4100ES fire alarm control unit.			

Network interface and Network Media Card Product Selection

4010ES fire alarm control units are compatible with Autocall ES Net network fire alarm products.

- Refer to datasheet **AC4100-0076** for additional information on compatible ES Net fire alarm products.
- Refer to datasheet **AC4100-0061** for additional information on the BNIC.

Cabinet dimension reference

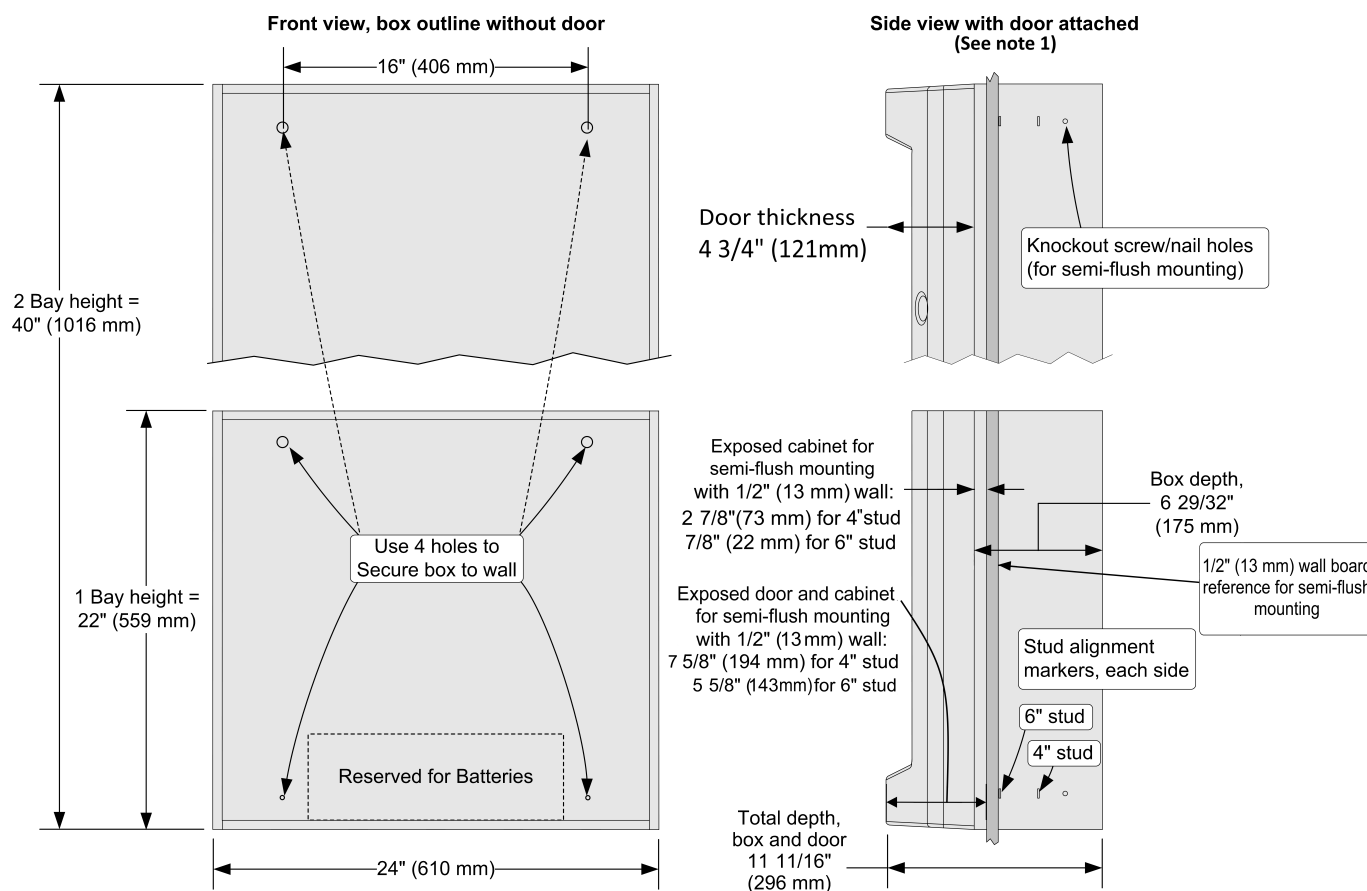


Figure 12: Cabinet dimension reference

Note:

Side view dimensions are shown with minimal cabinet and door protrusion from the exterior wall. For 6 in. stud construction with minimum protrusion shown, the door will open 90 degrees. To allow the door to open 180 degrees, the exposed cabinet dimension from the exterior wall must be a minimum of 3 in. (76 mm) for both 4 in. and 6 in. stud construction.

Cabinet one and two bay loading reference

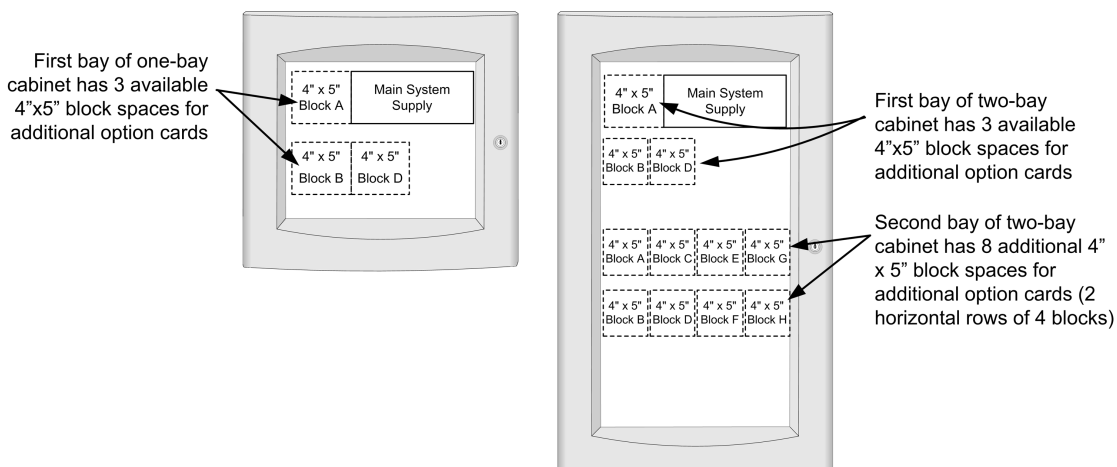


Figure 13: Loading reference

Note: Some spaces may be used by basic control unit features.

Miscellaneous accessories

Table 9: LED kits (LEDs are pluggable, use to change color for local application requirements)

SKU	Description
4100-9843	8 Yellow LED Kit
4100-9844	8 Green LED Kit
4100-9845	8 Red LED Kit
4100-9855	8 Blue LED Kit
A100-0650	Battery Shelf, required for 50 Ah batteries in two bay cabinets only
A010-9831	French Applique Kit for ES Touch Screen Display Panels (order separately as required for Canadian French panels)

General specifications

Table 10: General specifications

Specification	Rating		
AC input current	120 VAC Models	4 A maximum, 120 VAC @ 60 Hz nominal	
	220 VAC to 240 VAC models	2 A maximum, 220/230/240 VAC @ 50 or 60 Hz	
Power supply output ratings (nominal 28 VDC on AC, 24 VDC on battery backup)	Total power supply output rating	Including module currents and auxiliary power outputs; 8 A total for Special Application appliances; 4 A total for Regulated 24 DC power (see below for details)	Output switches to battery backup during mains AC failure or brownout conditions
	Auxiliary power tap	2 A maximum, rated 19.1 VDC to 31.1 VDC	
Special Application appliances, maximum of 70 appliances per NAC	Autocall 4901, 4903, 4904, and A4906 Series horns, strobes, and combination horn or strobes and speaker or strobes. Contact your Autocall product representative for compatible appliances.		
Regulated 24 DC appliances	Power for other UL listed appliances; use associated external synchronization modules where required		
Battery charger rating (sealed lead acid batteries)	Battery capacity range	Battery charging of 6.2 Ah up to 50 Ah or 110 Ah batteries. For two bay cabinets, battery capacity above 50 Ah requires a separate cabinet. See data sheet <i>AC2081-0012</i> for further details.	
	Charger characteristics and performance	Temperature compensated, dual rate, recharges depleted batteries within 48 hours per UL Standard 864; to 70% capacity in 12 hours per ULC Standard S527	
Battery current	9 A maximum @ 24 VDC (during battery operation)		
Environmental	Operating temperature	32°F to 120°F (0°C to 49°C)	
	Operating humidity	Up to 93% RH, non-condensing @ 90°F (32°C) maximum	
Additional technical reference	Installation instructions	579-989AC	
	Operating instructions	579-969AC	

4010ES Card Address Allocation

The 4010ES has a maximum internal and external card address limit of 20 card addresses. See Table 11 below to calculate 4010ES card address allocation.

Table 11 is a list of 4010ES equipment and the quantity of card addresses they consume.

- For the applicable control unit, write in the card address consumption value in the card address allocation column.

Note: Select one control unit only.

- For the option cards to be installed on the 4010ES, write in the Card address consumption value in the card address allocation column.
- Total the card address allocation column.

Note: The total must not exceed 20.

Table 11: Card address allocation

SKU	Description	Card address consumption	Card address allocation
Control Units (Select One)			
A010-9401 A010-9401BA A010-9402 A010-9402BA A010-9501 A010-9501BA A010-9502 A010-9502BA A010-9503BA	2x40 Display, one IDNet2 Communications Channel; or one MX Channel, 1-Bay Box	2	
A010-9421 A010-9421BA A010-9422 A010-9422BA A010-9521 A010-9521BA A010-9522 A010-9523BA	2x40 Display, one IDNet2 Communications Channel and one IDNet 2+2 Communications Channel; or 2 MX Communications Channels, 2-Bay Box	3	
A010-9425 A010-9425BA A010-9426 A010-9426BA	InfoAlarm Display, one IDNet2 and one IDNet 2+2 Communications Channel, 2-Bay Box	4	
A010-9527BA	InfoAlarm Display, one IDNet2 Communications Channel; or one MX Communications Channel, 2-Bay Box	3	
Control Unit Option Cards (Select As Required)			
A010-9901	Flat VESDA HLI Card	1	
A010-6310	Flat ES Net Network Interface Card	1	
A010-9908	4 Point Flat Aux Relay Module	1	
A010-9912	Serial DACT	1	
A010-9914	Building Network Interface Card	1	
A010-9917	MX Loop Card	1	
A010-9918	Dual RS-232 Module	1	
A010-9935	8 point zone/relay 4x5" flat module	1	
A010-9929	IDNet 2+2 Communications Module	1	
Remote Annunciation (Select As Required)			

Table 11: Card address allocation

SKU	Description		Card address consumption	Card address allocation
A100-9401	Remote InfoAlarm Command Center	Red Cabinet, English	2	
A100-9403		Platinum Cabinet, English	2	
A100-9441		Red Cabinet, with blank inserts for key labels	2	
A100-9443		Platinum Cabinet, with blank inserts for key labels	2	
A4606-9102		4010ES RUI LCD Annunciator, English	1	
A4606-9102BA		4010ES RUI LCD Annunciator, English	1	
A602-9101	Status Command Unit (SCU) LED Annunciator		1	
A602-9102	Remote Command Unit (RCU) LED Annunciator w/control		1	
A602-9150	Graphic I/O RCU/SCU Assembly for custom annunciator Control Units		1	
A602-7101	Graphic I/O RCU/SCU Assembly for custom annunciator Control Units		1	
A602-7001	RCU for cabinet mount		1	
A602-6001	SCU for cabinet mount		1	
A100-7401	24 Point I/O Graphic Module (requires mounting cabinet)		1	
A100-7402	64/64 LED Switch Controller for custom annunciator Control Units		1	
A100-7403	32 Point LED Driver Module for custom annunciator Control Units		1	
A100-7404	32 Point Switch Input Module for custom annunciator Control Units		1	
	Total card addresses - not to exceed 20		TOTAL	
*Note: (BA) means available with or without BA suffix; products with suffix "BA" are assembled in the USA				

Additional 4010ES and network product reference

Table 12: Additional 4010ES and network product reference

Subject	Data sheet
Serial DACT (SDACT) for 4100ES, 4010ES, 4007ES	AC2080-0009
Seismic Battery Brackets Reference	AC2081-0019
4009 IDNet NAC Extender	AC4009-0002
4010ES FACUs with Conventional Notification	AC4010-0004
4010ES Extinguishing Release Applications	AC4010-0005
4010ES Extinguishing Release Applications (INTL)	AC4010-0007
4010ES FACUs with Addressable Notification	AC4010-0011
4010ES FACUs with Addressable Notification (INTL)	AC4010-0012
External 110 Ah Battery Charger for 4100ES, 4010ES	AC4081-0002
Graphic I/O Modules for 4100ES, 4010ES, 4007ES	AC4100-0005
Interface to VESDA Air Aspiration Detection Systems	AC4100-0026
BACpac Ethernet Module	AC4100-0051
Building Network Interface Card (BNIC)	AC4100-0061
ES Net Network Products and Specifications	AC4100-0076
NDU with EPS Power Supplies for ES Net	AC4100-0104
Remote ES Touch Screen Displays for 4100ES and 4010ES Panels	AC4100-1070
TrueSite Workstation	AC4190-0016
TrueSite Incident Commander	AC4190-0020
24-Pin Dot Matrix Fire Alarm System Remote Printer	AC4190-0027
SCU/RCU Annunciators	AC4602-0001
A4606-9102 Remote LCD Annunciator	AC4606-0002

